




# LED Driver Module

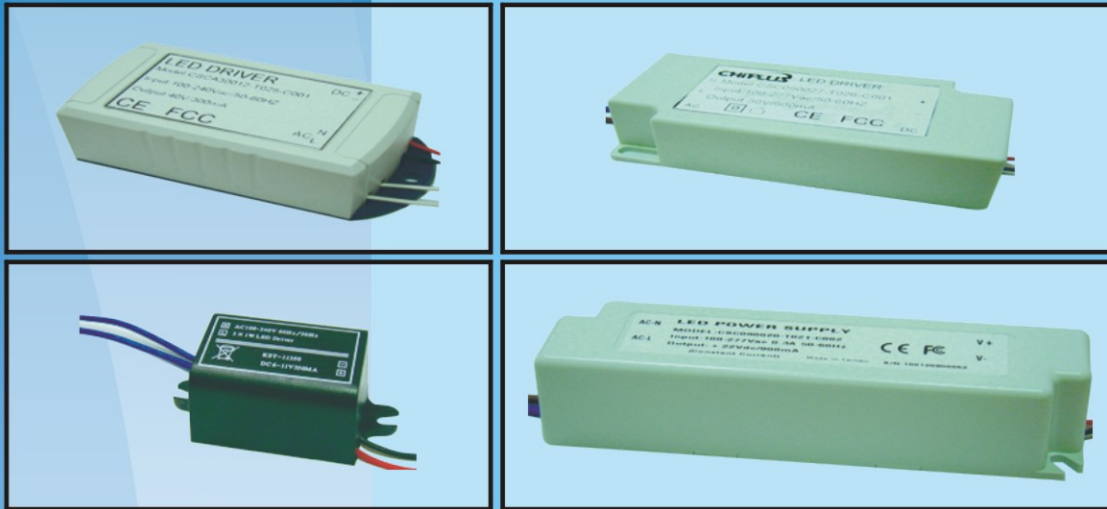

## Product Features :

- Input AC Voltage can up to AC277V
- IP67 design for indoor installations
- Protections: Short Circuit / Over Voltage / Over Temperature
- Build in Active PFC Circuit
- Compliant with CE/LVD/PSE/FCC/VCCI/UL Certification
- Constant Current with high accuracy  $\pm 5\%$

Module P/N	CSC0100015	CSC0100024	CSC0100042	CSC080019	CSC035010	CSC035012	CSP011044	CSCA30012
Application	External	External	External	External	External	External	External	External
AC Vin(V)	85~277	85~277	85~277	85~277	85~277	85~277	85~277	90~265
Output Watt(max)	15	25	42	20	10	12	45	12
LED Current(mA)	1000	1000	1000	800	350	350	1100	300
LED Voltage(V)	9~15	20~24	36~42	20~24	24~30	30~36	26~40	39~41
PFC Type	N/A	Active	Active	Active	Active	Active	Active	Passive
Efficiency(%)	85	85	85	85	85	85	85	85
Dimension(LxWxH,mm)	100x45x28	110x43x25	100x50x30	115x30x30	40x28x25	40x28x25	110x40x28	65x38x28

For more information, please contact them as below. [www.chiplus.com](http://www.chiplus.com)

General Manager of China Region: Randy Tsai, [randy\\_tsai@chiplus.com](mailto:randy_tsai@chiplus.com), 86-13923807448

Sales V.P : Paul Wang, [paul\\_wang@chiplus.com](mailto:paul_wang@chiplus.com), 886-3-5637887 Ext : 101

Application Engineering Director : Derrick Peng, [derrick\\_peng@chiplus.com](mailto:derrick_peng@chiplus.com), 886-3-5637887 Ext : 104

Sales Manager of China Region: Ben Pai, [ben\\_pai@chiplus.com](mailto:ben_pai@chiplus.com), 886-3-5637887 Ext : 112